


۰,۱۲ کیلووات - ۰,۱۶ اسب بخار - ۳۰۰۰ دور

| TECHNICAL SPECIFICATIONS | |
|---------------------------------|--------------|
| PARAMETERS | Value |
| Motor type | 56-2B |
| Frame size | 56 |
| Output Power (KW/HP) | 0.12/0.16 |
| Voltage (V) | 220/380 |
| Current (A) | 0.86/0.5 |
| (%)Efficiency | 60.8 |
| Power Factor (Cos phi) | 0.56 |
| Starting current/Rated currentt | 4.1 |
| Starting Tourqe/Rated Tourqe | 3.8 |
| BreakdownTourqe/Rated Tourqe | 4.2 |
| Voltage-D/Y (V) | 220/380 |
| Current-D/Y (A) | 0.86/0.5 |
| (%) Efficiency | 60.8 |
| (Kg) Weight | 3.4 |
| Color | Blue-RAL5001 |
| Body | Aluminium |
| Output power (KW/HP) | 0.12/0.16 |
| Rated Voltage D/Y-(V) | 220/380 |
| Rated speed (RPM) | 2835 |
| Rated Current D/Y(A) | 0.86/0.5 |
| Rated torque (N m) | 0.4 |
| (%) Efficiency | 60.8 |
| Power factor (Cos phi) | 0.56 |
| Starting current/Rated current | 4.1 |
| Starting torque/Rated torque | 3.8 |
| breakdown torque/Rated torque | 4.2 |
| (Kg*m2) Moment of inertia | 0.000105 |
| Weight (kg) | 3.4 |
| Stator winding wire material | copper |
| Rotor winding material | aluminium |
| Driven end bearing | 6201-2Z |
| Non-driven end bearing | 6201-2Z |
| Insulation class | F |
| Thermal Class | B |
| درجه حفاظت (IP) | 54 |

۰,۱۲ کیلووات - ۰,۱۶ اسب بخار - ۳۰۰۰ دور

الکتروموتور (۵۶-۲B) ۵۴۴ ۲۲۰/۳۸۰ ۱۲-۳۰۰۰ ۵۶M۲B

فلنج B۳

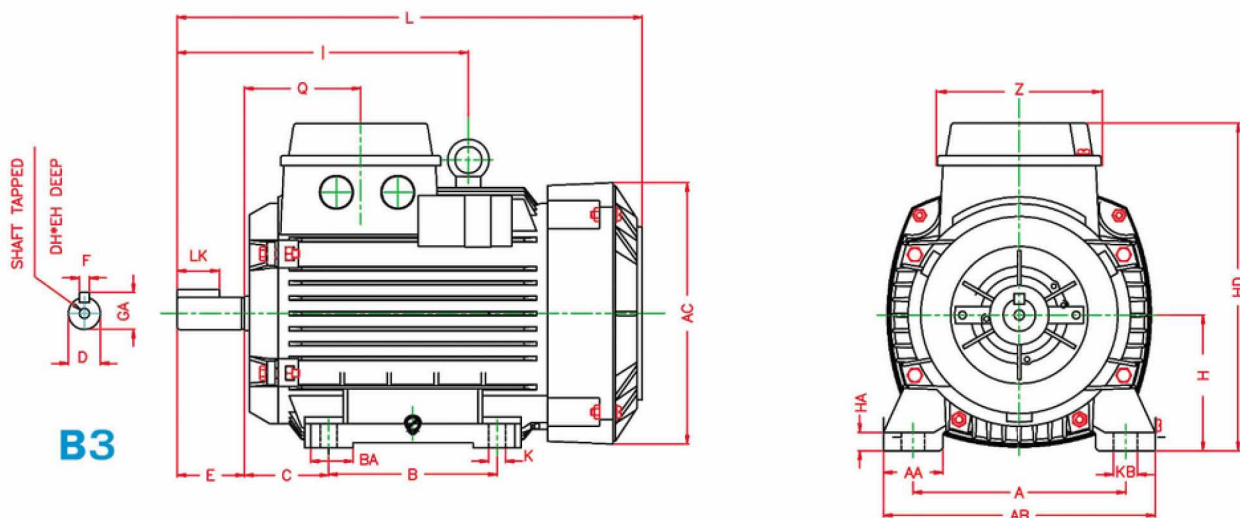

B3

| B | BA | K | KB | AB | A | AA | HA | AC | Z | Q | I | L | E | EH | DH | GA | LK | F | D |
|----|----|---|----|-----|----|----|----|-----|----|------|---|-----|----|----|----|------|----|---|---|
| 71 | 19 | 6 | 10 | 112 | 90 | 22 | 10 | 106 | 76 | 55.5 | - | 189 | 20 | - | - | 10.2 | 12 | 3 | 9 |

| FLANGE SYM (DIN) | FLANGE SYM (IEC) | T | S | P | N | M | LA | AD | HD | H | C |
|------------------|------------------|---|---|---|---|---|----|----|-----|----|----|
| - | - | - | - | - | - | - | - | - | 145 | 56 | 36 |