


۰.۹ کیلووات - ۱۲ اسب بخار - ۱۵۰۰ دور

TECHNICAL SPECIFICATIONS	
PARAMETERS	Value
Motor type	56-4B
Frame size	56
Output power (KW/HP)	0.09/0.12
Rated voltage D/Y-(V)	220/380
Rated Speed (RPM)	1335
Rated current D/Y-(A)	0.7/0.4
Rated torque (N m)	0.64
Efficiency (%)	56
Power factor (cos phi)	0.62
Starting current/Rated current	2.8
Starting torque/Rated torque	2.5
Breakdown torque/Rated torque	2.4
Moment of inertia (Kg*m2)	0.000172
Weight (Kg)	3.6
Color	Blue-Ral5001
Body	Aluminium
Stator winding wire material	copper
Rotor winding material	aluminium
Driven end bearing	6201-2Z
Non-driven end bearing	6201-2Z
Insulation class	F
Thermal Class	B
IP درجه حفاظت	54

الکتروموتور (۵۶-۴B) ۲۲۰/۳۸۰ ۵۴۴ ۰۹-۱۵۰۰ ۵۶MFB

فلنج B3

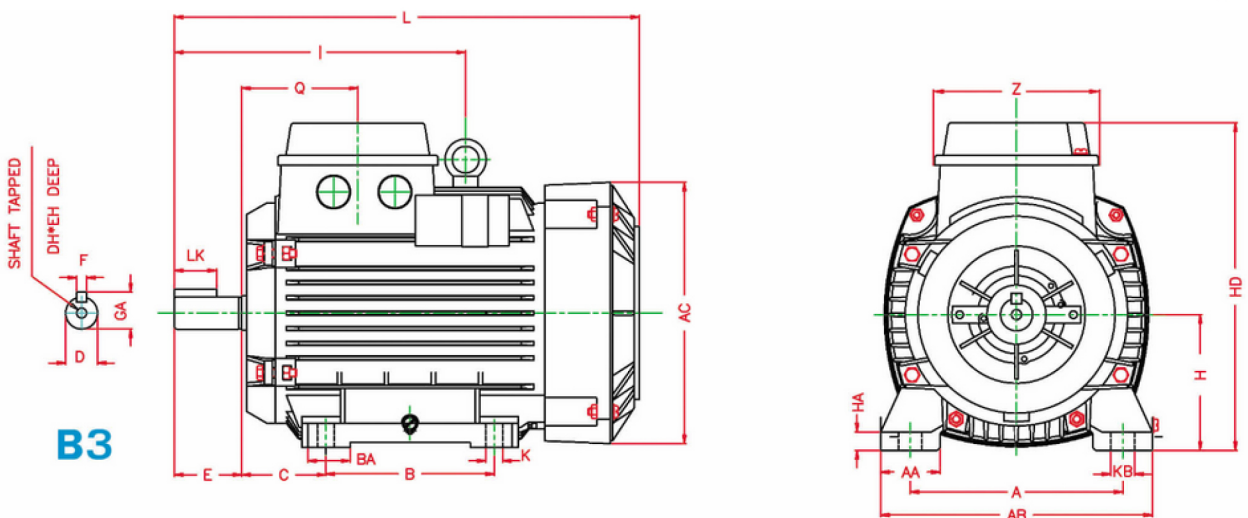

B	BA	K	KB	AB	A	AA	HA	AC	Z	Q	I	L	E	EH	DH	GA	LK	F	D
80	25	7	10	125	100	25	10	123	76	54.5	-	214	23	-	-	12.5	12	4	11

FLANGE SYM (DIN)	FLANGE SYM (IEC)	T	S	P	N	M	LA	AD	HD	H	C
-	-	-	-	-	-	-	-	-	158	63	40