


TECHNICAL SPECIFICATIONS	
PARAMETERS	Value
Motor type	100L4B
Frame size	100L
Output power (KW/HP)	3/4
Rated voltage D/Y-(V)	220/380
Rated Speed (RPM)	1420
Rated current D/Y-(A)	11.8/6.8
Rated torque (N m)	20.25
Efficiency (%)	85.5
Power factor (cos phi)	0.79
Starting current/Rated current	5.6
Starting torque/Rated torque	2.7
Breakdown torque/Rated torque	3.1
Moment of inertia (Kg*m2)	0.006274
Weight (Kg)	22.9
Color	Blue-Ral5001
Body	Aluminium
Stator winding wire material	copper
Rotor winding material	aluminium
Driven end bearing	6206-2Z
Non-driven end bearing	6206-2Z
Insulation class	F
Thermal Class	B
IP درجه حفاظت	54

### الکتروموتور (۱۰۰LFB) ۲۲۰/۳۸۰ ۵FF ۱۵۰۰ ۳-۱۰۰LFB

### فلنج B3

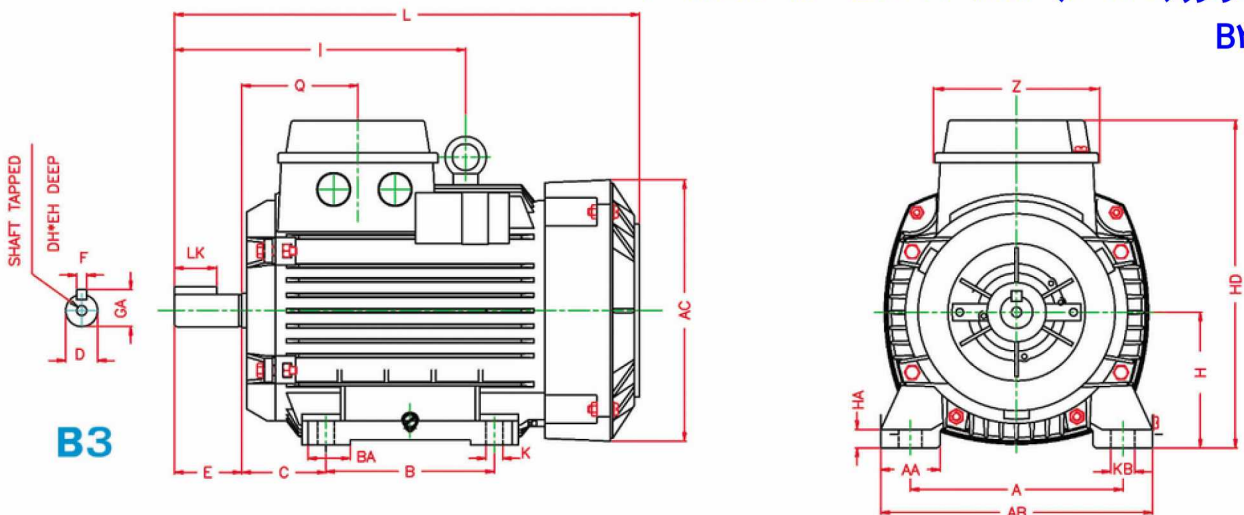

B	BA	K	KB	AB	A	AA	HA	AC	Z	Q	I	L	E	EH	DH	GA	LK	F	D
140	35	12	17	200	160	40	12	194	96	73.5	-	366	60	22	M10	31	40	8	28

FLANGE SYM (DIN)	FLANGE SYM (IEC)	T	S	P	N	M	LA	AD	HD	H	C
-	-	-	-	-	-	-	-	-	233	100	63

